


Item	EL-PL606036	EL-PL606040	EL-PL606048
Size		596x596x11mm	
Input voltage on driver		AC85-265V	
Operating frequency		50~60Hz	
Power factor		>0.95	
Rated power	36W	40W	48W
Driver power usage		1W	
Temp (K)	2800-4000K (WW), 4000-5000K (NW), 5000-8000K (PW)		
Glowing angle	120°		
LED Q'ty (Pcs)	360 pcs	400 pcs	480 pcs
Flux (lm)	2550Lm	2800Lm	3360Lm
CRI	0,85 ± 5		
Driver efficiency	>0,85		
IP Grade	ip 40		
Operating environment	working temperature: -20° ~50° , working humidity: 30%~85%		
Net weight	19.8 kg (4pcs/box)	20 kg (4pcs/box)	20.2 kg (4pcs/box)
Cut out (mm)		596x596	

EL-PL6060

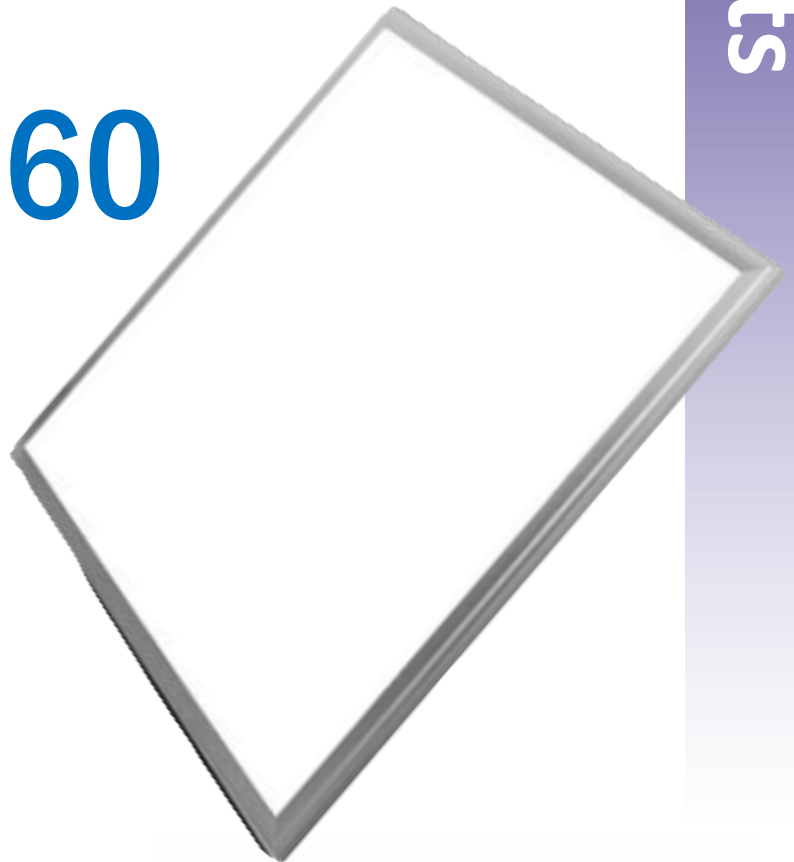

Item	EL-PL601272
Size	696x1196x11mm
Input voltage on driver	AC85-265V
Operating frequency	50~60Hz
Power factor	>0.95
Rated power	72W
Driver power usage	1W
Temp (K)	2800-4000K (WW), 4000-5000K (NW), 5000-8000K (PW)
Glowing angle	120°
LED Q'ty (Pcs)	720
Flux (lm)	5040 lm
CRI	0,85 ± 5
Driver efficiency	>0,85
IP Grade	ip 40
Operating environment	working temperature: -20° ~50° , working humidity: 30%~85%
Net weight	36.5 kg (4 pcs/box)
Cut out (mm)	596x1196

EL-PL6012




Item	EL-PL301236	EL-PL301240	EL-PL301248
Size		296x1196x11mm	
Input voltage on driver		AC85-265V	
Operating frequency		50~60Hz	
Power factor		>0.95	
Rated power	36W	40W	48W
Driver power usage		1W	
Temp (K)	2800-4000K (WW), 4000-5000K (NW), 5000-8000K (PW)		
Glowing angle	120°		
LED Q'ty (Pcs)	360 pcs	400 pcs	480 pcs
Flux (lm)	2550Lm	2800Lm	3360Lm
CRI	0,85 ± 5		
Driver efficiency	>0,85		
IP Grade	ip 40		
Operating environment	working temperature: -20° ~50° , working humidity: 30%~85%		
Net weight	19.8 kg (4pcs/box)	20 kg (4pcs/box)	20.2 kg (4pcs/box)
Cut out (mm)		296x1196	

EL-PL3012




Item	EL-PL306018	EL-PL306020	EL-PL306024
Size		296x596x11mm	
Input voltage on driver		AC85-265V	
Operating frequency		50~60Hz	
Power factor		>0.95	
Rated power	18W	20W	24W
Driver power usage		1W	
Temp (K)	2800-4000K (WW), 4000-5000K (NW), 5000-8000K (PW)		
Glowing angle		120°	
LED Q'ty (Pcs)	180 pcs	200 pcs	240 pcs
Flux (lm)	1360 Lm	1400Lm	1680Lm
CRI		0,85 ± 5	
Driver efficiency		>0,85	
IP Grade		ip 40	
Operating environment	working temperature: -20° ~50° , working humidity: 30%~85%		
Net weight	20.6 kg (8 pcs/box)	20.6 kg (8 pcs/box)	20.6 kg (8 pcs/box)
Cut out (mm)		296x596	

EL-PL3060

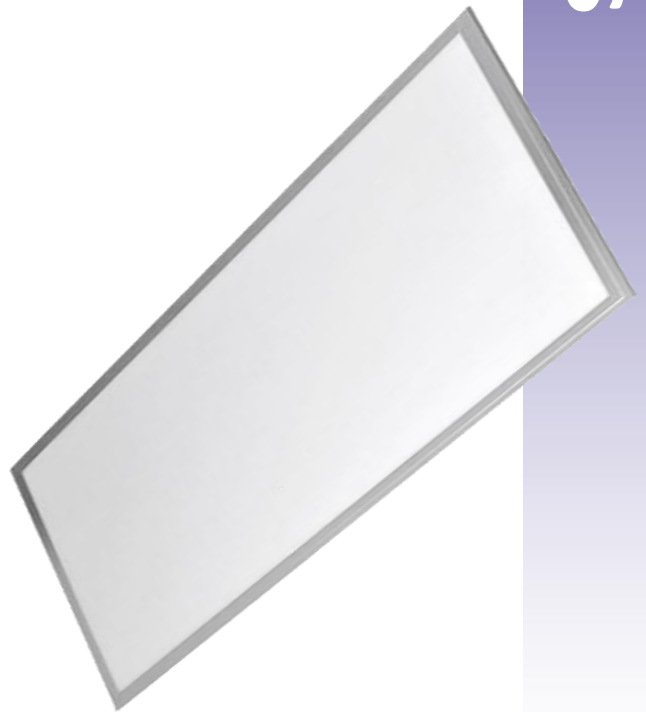


Item	EL-PL206018	EL-PL206020	EL-PL206024
Size		196x596x11mm	
Input voltage on driver		AC85-265V	
Operating frequency		50~60Hz	
Power factor		>0.95	
Rated power	18W	20W	24W
Driver power usage		1W	
Temp (K)	2800-4000K (WW), 4000-5000K (NW), 5000-8000K (PW)		
Glowing angle		120°	
LED Q'ty (Pcs)	180 pcs	200 pcs	240pcs
Flux (lm)	1360 Lm	1400Lm	1480 Lm
CRI		0,85 ± 5	
Driver efficiency		>0,85	
IP Grade		ip 40	
Operating environment	working temperature: -20° ~50° , working humidity: 30%~85%		
Net weight	23 kg (10pcs/box)	23KG(10pcs/box)	23KG(10pcs/box)
Cut out (mm)		196x596	

EL-PL2060

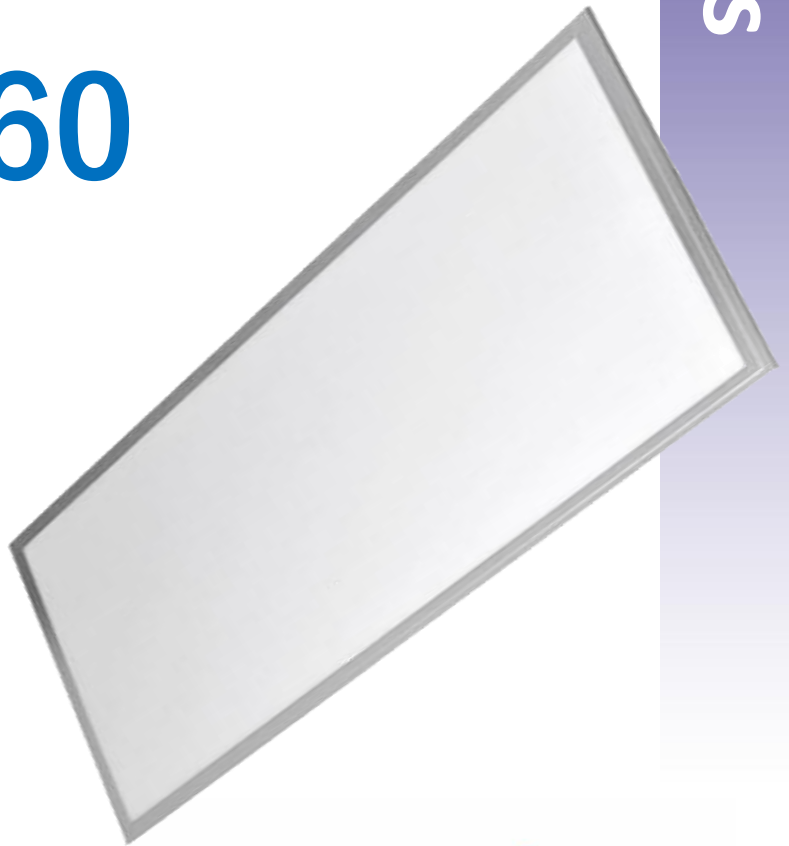

Item	EL-PL156018	EL-PL156020	EL-PL156024
Size		146x596x11mm	
Input voltage on driver		AC85-265V	
Operating frequency		50~60Hz	
Power factor		>0.95	
Rated power	18W	20W	24W
Driver power usage		1W	
Temp (K)	2800-4000K (WW), 4000-5000K (NW), 5000-8000K (PW)		
Glowing angle		120°	
LED Q'ty (Pcs)	180 pcs	200 pcs	240pcs
Flux (lm)	1360 Lm	1400Lm	1480 Lm
CRI		0,85 ± 5	
Driver efficiency		>0,85	
IP Grade		ip 40	
Operating environment	working temperature: -20° ~-50° , working humidity: 30%~85%		
Net weight	19.2 kg (10pcs/box)	19.2 kg (10pcs/box)	19.2 kg (10pcs/box)
Cut out (mm)		146x596	

EL-PL1560

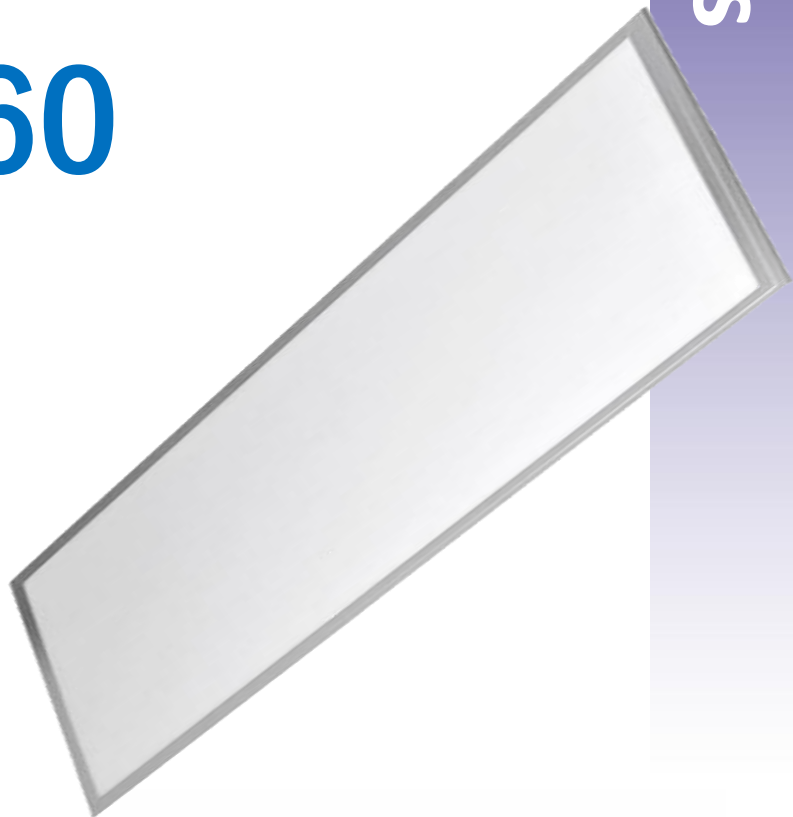

Item	EL-PL303018	EL-PL303020	EL-PL303024
Size		296x296x11mm	
Input voltage on driver		AC85-265V	
Operating frequency		50~60Hz	
Power factor		>0.95	
Rated power	18W	20W	24W
Driver power usage		1W	
Temp (K)	2800-4000K (WW), 4000-5000K (NW), 5000-8000K (PW)		
Glowing angle		120°	
LED Q'ty (Pcs)	180 pcs	200 pcs	240 pcs
Flux (lm)	1260Lm	1400Lm	1680Lm
CRI		0,85 ± 5	
Driver efficiency		>0,85	
IP Grade		ip 40	
Operating environment	working temperature: -20° ~50° , working humidity: 30%~85%		
Net weight	14 kg (10pcs/box)	14 kg (10pcs/box)	14 kg (10pcs/box)
Cut out (mm)		296x296	

EL-PL3030

